

Jumbo Display




Features

- Display sizes 2", 4", 6", 8", 12" available
- Multicolour indication in 4" and 6"
- Video alarm by changing the colour of indication
- Accepts input like Pt. – 100 T/c 0/4 to 20 mA, 0 – 10 V, mV from load cell
- RS 232 / RS 485 communication available for some display sizes

Technical Specifications

- **Input** : Pt. 100, T/c (J, K) 0 – 10 V mA
- **Output** : As per requirement
- **Supply** : 230 V AC, 110 V AC / 240 V DC
- **Aux. Output** : 24 V / 12 V, 30 mA
- **Accuracy** : 0.25% of F. S. including linearity, repeatability
- **Indication** : 1", 2", 4", 6" 8", 12" size Red or multicolour
- **Relay Output** : 5A AC @ 230V AC
- **Operating Temp & Humidity** : 0 – 55°C, 90% Rh NC
- **Dimensions** : As per display size
- **Mounting** : Wall mounting / Hanging type
- **Communication** : RS 232 / RS485 Modbus

Dimensional & Electrical Connections

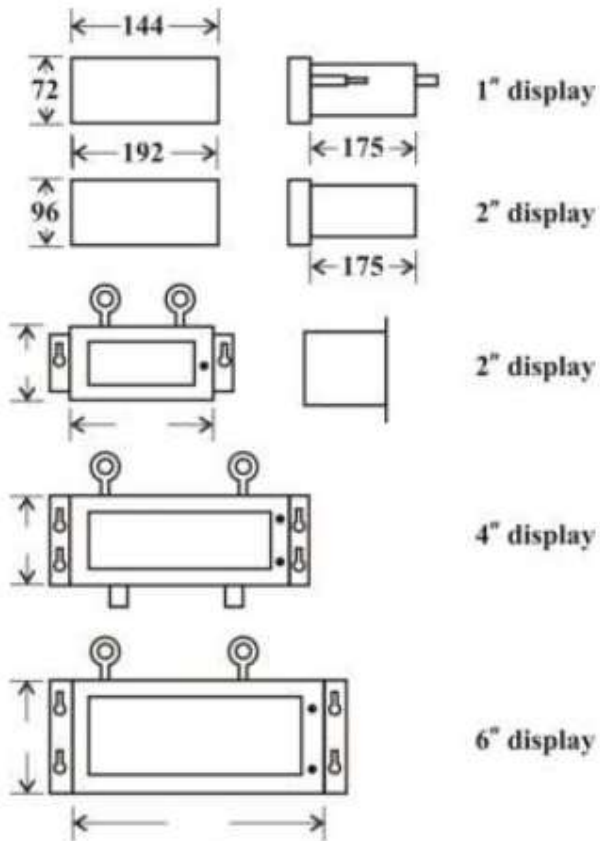

Quick links

- Temperature / Process Indicators
 - Temperature / Process Controller
 - Temperature Transmitter
 - Temperature Scanner
 - Multipoint Temperature Indicators
 - Temperature Indicators / Controllers With Jumbo Display
-
- P^H Indicators
 - P^H Transmitters
 - P^H Control Systems
 - Signal Isolator / Signal Converters
 - Process Calibrators / Simulators
 - Jumbo Display Process Indicators / Controllers
 - Converter

